

Components

SSE & SSEM

1-11/16" Wide Two Terminals, One End



STRIP AND RING



- 8-1/8 - 72" Lengths
- 200 - 2,550 Watts
- 120 and 240 Volt
- 10 - 13 W/in²
- Optional Mounting Tabs


Type SSE

- Rust Resisting One-Piece Iron Sheath
- 750°F Max. Sheath Temp.

Type SSEM

- Monel One-Piece Sheath
- 900°F Max. Sheath Temp.

Dimensions

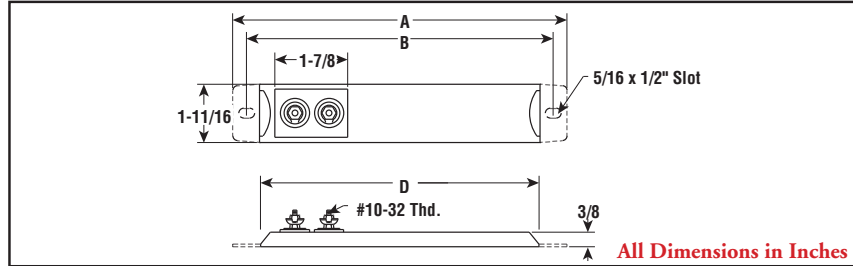

Specifications and Ordering Information

Dimensions (In.)			Watts	W/in ²	Model	120V		240V		Wt. (Lbs.)
A	B	D				Stock	PCN	Stock	PCN	
SSE – Rust-Resisting Iron Sheath										
8-1/8	7-3/8	6-5/8	200	13	SSE-820	NS	141495	NS	—	0.7
10-5/8	9-7/8	9-1/8	275	11	SSE-1027	NS	141508	NS	141516	0.8
12-1/8	11-3/8	10-5/8	320	11	SSE-1232	NS	141524	NS	141532	0.9
14-1/8	13-3/8	12-5/8	375	10	SSE-1437	NS	141540	NS	141559	1
15-3/8	14-5/8	13-7/8	415	10	SSE-1541	NS	141567	NS	141575	1.1
18	17-1/4	16-1/2	500	10	SSE-1849	NS	141583	NS	141591	1.4
19-5/8	18-7/8	18-1/8	550	10	SSE-1955	NS	141604	NS	141612	1.5
21-1/8	20-3/8	19-5/8	625	10	SSE-2060	NS	141620	NS	141639	1.7
23-7/8	23-1/8	22-3/8	750	10	SSE-2467	NS	141647	NS	141655	1.8
25-5/8	24-7/8	24-1/8	800	10	SSE-2572	NS	141663	NS	141671	2.1
30-5/8	29-3/8	28-1/8	1,000	10	SSE-3085	NS	141680	NS	141698	2.3
33-5/8	32-3/8	31-1/8	1,250	12	SSE-3392	NS	141700	NS	141719	2.7
36	34-7/8	33-1/2	1,500	13	SSE-3611	NS	141727	NS	141735	2.9
38-5/8	37-3/8	36-1/8	1,500	12	SSE-3817	NS	141743	NS	141751	3.2
42-5/8	41-3/8	40-1/8	1,500	11	SSE-4315	NS	141760	NS	141778	3.4
48	46-3/4	45-1/2	1,650	10	SSE-4816	NS	141786	NS	141794	3.8
54	52-3/4	51-1/2	1,875	10	SSE-5418	NS	141807	NS	141815	4.2
64	62-3/4	61-1/2	2,250	10	SSE-6422	—	—	NS	141823	5.1
72	70-3/4	69-1/2	2,550	10	SSE-7225	—	—	NS	141831	5.8
SSEM – MONEL® Sheath										
8-1/8	7-3/8	6-5/8	200	13	SSEM-820	NS	141840	NS	—	0.7
10-5/8	9-7/8	9-1/8	275	11	SSEM-1027	NS	141858	NS	141866	0.8
12-1/8	11-3/8	10-5/8	320	11	SSEM-1232	NS	141874	NS	141882	0.9
14-1/8	13-3/8	12-5/8	375	10	SSEM-1437	NS	141890	NS	141903	1
15-3/8	14-5/8	13-7/8	415	10	SSEM-1541	NS	141911	NS	141920	1.1
18	17-1/4	16-1/2	500	10	SSEM-1849	NS	141938	NS	141946	1.4
19-5/8	18-7/8	18-1/8	550	10	SSEM-1955	NS	141954	NS	141962	1.5
21-1/8	20-3/8	19-5/8	625	10	SSEM-2060	NS	141970	NS	141989	1.7
23-7/8	23-1/8	22-3/8	750	10	SSEM-2467	NS	141997	NS	142009	1.8
25-5/8	24-7/8	24-1/8	800	10	SSEM-2572	NS	142017	NS	142025	2.1
30-5/8	29-3/8	28-1/8	1,000	10	SSEM-3085	NS	142033	NS	142041	2.3
33-5/8	32-3/8	31-1/8	1,250	12	SSEM-3392	NS	142050	NS	142068	2.7
36	34-7/8	33-1/2	1,500	13	SSEM-3611	NS	142076	NS	142084	2.9
38-5/8	37-3/8	36-1/8	1,500	12	SSEM-3817	NS	142092	NS	142105	3.2
42-5/8	41-3/8	40-1/8	1,500	11	SSEM-4315	NS	142113	NS	142121	3.4
48	46-3/4	45-1/2	1,650	10	SSEM-4816	NS	142130	NS	142148	3.8
54	52-3/4	51-1/2	1,875	10	SSEM-5418	NS	142156	NS	142164	4.2
64	62-3/4	61-1/2	2,250	10	SSEM-6422	—	—	NS	142172	5.1
72	70-3/4	69-1/2	2,550	10	SSEM-7225	—	—	NS	142180	5.8

Stock Status: S = stock NS = non-stock
To Order—Specify model, PCN, watts, volts, phase and quantity.