

Components


HSN, HSW & RHSW

Half & Full Sheath Ring Heaters

- Narrow Ring (type HSN)
- Wide Ring (type HSW)
- Split Rivet/Wide Ring (type RHSW)
- 500 - 1,000 Watts
- 120 and 240 Volt
- Use Ring Clamp 6018 to Mount Element to Heated Surface



Dimensions

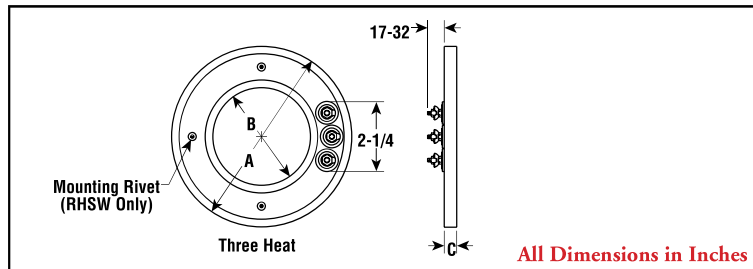

Features

Single-Heat Rings — Have two terminals for single wattage on-off switch or thermostat.

Three-Heat Rings — Have three terminals that split the heater into 2 equal circuits. Center terminal is common.

Easy Installation — Circular shape and use of Chromalox utility clamps simplifies use of ring heaters.

Nesting Rings to pack heat in a small area.

Half Sheath Units Have Reduced Thermal Gradient to Heated Surface — Provides faster heat up.

Specifications and Ordering Information

Dimensions (In.)			Rust-Resisting Iron Sheath								Chrome Steel Sheath								Wt. (Lbs.)
A	B	C	Watts	W/In ²	Model	120V		240V		Watts	W/In ²	Model	120V		240V				
						Stock	PCN	Stock	PCN				Stock	PCN	Stock	PCN			
HSN — Half Sheath																			
6	4-5/16	1/4	500	14	HSN-6	S	185818	—	—	—	—	—	—	—	—	—	0.5		
6	4-5/16	1/4	800	12	HSN-6	—	—	NS	185826	—	—	—	—	—	—	—	0.5		
6	4-5/16	1/4	—	—	—	—	—	—	—	500	14	HSN-60	NS	185834	—	—	0.5		
6	4-5/16	1/4	—	—	—	—	—	—	—	500	14	HSN-60	—	—	S	185842	0.5		
HSW — Full Sheath																			
6	3-3/4	1/4	1,000	24	HSW-61	S	185877	—	—	—	—	—	—	—	—	—	0.5		
HSW — Half Sheath																			
5-3/8	3-9/16	7/32	500	16	HSW-5	S	185746	—	—	—	—	—	—	—	—	—	0.5		
5-3/8	3-9/16	7/32	750	23	HSW-5	NS	—	S	185738	—	—	—	—	—	—	—	0.5		
6	3-3/4	1/4	500	12	HSW-6	S	185754	—	—	—	—	—	—	—	—	—	0.5		
6	3-3/4	1/4	500	12	HSW-6	S	—	S	185762	—	—	—	—	—	—	—	0.5		
6	3-3/4	1/4	700	17	HSW-6	—	185770	—	—	—	—	—	—	—	—	—	0.5		
6	3-3/4	1/4	700	17	HSW-6	—	—	NS	185789	—	—	—	—	—	—	—	0.5		
6	3-3/4	1/4	700	17	HSW-6-3	—	185797	—	—	—	—	—	—	—	—	—	0.5		
6	3-3/4	1/4	700	17	HSW-6-3	—	—	—	S	185800	—	—	—	—	—	—	0.5		
6	3-3/4	1/4	—	—	—	—	—	—	—	500	12	HSW-60	NS	185850	—	—	0.5		
6	3-3/4	1/4	—	—	—	—	—	—	—	800	20	HSW-60	—	—	NS	185869	0.5		
6	3-3/4	1/4	—	—	—	—	—	—	—	1,000	24	HSW-60-3	S	255767	—	—	0.5		
6	3-3/4	1/4	—	—	—	—	—	—	—	750	18	HSW-60-3	—	—	S	255759	0.5		
RHSW — Half Sheath																			
6	3-3/4	1/4	350	8	RHSW-6-3	S	185893	—	—	—	—	—	—	—	—	—	0.6		
6	3-3/4	1/4	500	12	RHSW-6	NS	185922	—	—	—	—	—	—	—	—	—	0.6		
RHSW — Full Sheath																			
6	3-3/4	1/4	800	19	RHSW-61	S	185906	—	—	—	—	—	—	—	—	—	0.6		
6	3-3/4	1/4	800	19	RHSW-61-3	—	—	NS	185914	—	—	—	—	—	—	—	0.6		

Stock Status: S = stock NS = non-stock
To Order—Specify model, PCN, watts, volts and quantity.
 1. “-3” in model number indicates 3 heat.
Other Note — Type HSN is not CSA Certified.