

**GENERAL-PURPOSE WRAPAROUND TOTE TANK/IBC HEATERS & INSULATORS**

**Features & Benefits**

- ▶ Insulated, full-coverage design
- ▶ Adjustable thermostat control — Up to 160° F (71° C)
- ▶ Two separate heat zones allow users to adjust heater output as content levels decrease
- ▶ Built-in high limit safety thermostat set at 195° F (91° C)
- ▶ Adjustable buckles allow heater to fit several sizes of caged, plastic, and metal tote tanks/IBCs
- ▶ 6 ft (1.8 m) long power cord with choice of plug or crimped ferrule leads
- ▶ Wrap-around blanket design allows you to heat a tote tank/IBC from the outside
- ▶ Even heat distribution and maximum energy efficiency
- ▶ Does not contaminate or scorch your product
- ▶ Easy-to-use — simple plug-and-play design
- ▶ Reusable and rugged — long service life
- ▶ Safe — heater has unique 360° grounded heating element and cool-touch surface for your safety



Image above shown with optional top cover (sold separately)

**Specifications**

- Outer Material:** Silicone impregnated cloth
- Insulation:** 0.25 in (6 mm) thick fiberglass
- Height:** 36 in (914 mm), 42 in (1067 mm), or 48 in (1220 mm)
- Circumference:** Fits any vessel from 160 in (4064 mm) to 192 in (4877 mm)
- Closure Method:** Adjustable nylon straps with buckles (two across the top and three around the tank)
- Voltage Options:** 120 or 240 VAC
- Operating Temperature:** Adjustable up to 160° F (71° C)
- Maximum Exposure Temperature:** 500° F (260° C)
- Built-in High-Limit Safety Thermostat:** Manual reset 195° F (91° C)
- Heating Element:** 360° grounded heating element for your safety
- Dielectric Strength:** Over 2000 volts
- Power Cord:** 6 ft (1.8 m) long
  - 120 VAC: 3-prong grounded plug (NEMA 5-15P)
  - 240 VAC: Choice of 3-prong grounded plug (NEMA 6-15P) or crimped ferrule leads
- IP Rating:** IP2X



**Plug & Play**

CE (when ordered with crimped ferrule lead option)



**Controls temperature easily with adjustable thermostats**



**Fits several tote tank sizes with adjustable nylon straps and buckles**



**Mouse hole provides easy access to spigot**

# Container Heaters




## GENERAL-PURPOSE WRAPAROUND TOTE TANK/IBC HEATERS & INSULATORS

### How to Measure Your Tote Tank/IBC

1. Measure the height of the tote tank /IBC (Not including the pallet or support stand).
2. Measure the length and width of the tank. This determines the tank perimeter for the heated area.

$$\frac{\text{Tank Length}}{\text{Tank Length}} \times 2 + \frac{\text{Tank Width}}{\text{Tank Width}} \times 2 = \frac{\text{Tank Perimeter}}{\text{Tank Perimeter}}$$

Note: If tank perimeter measurement is below 160 in (4064 mm) or above 192 in (4877 mm), contact factory for heater recommendation.

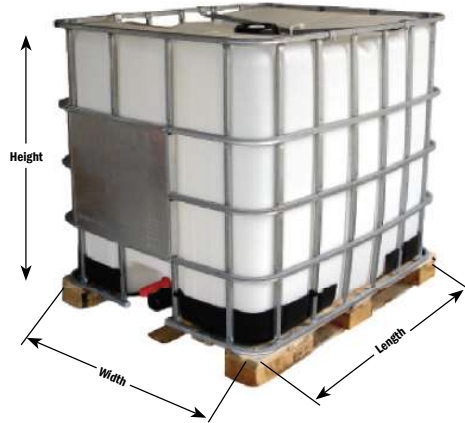

### Ordering Information

| Part No.<br>120 VAC<br>with NEMA<br>5-15P plug | Part No.<br>240 VAC<br>with NEMA<br>6-15P plug | Part No.<br>240 VAC<br>with crimped<br>ferrule leads | Height<br>in (mm) | Capacity<br>gal (l)      | Tank Perimeter<br>Minimum<br>in (mm) | Tank Perimeter<br>Maximum<br>in (mm) | Weight<br>lbs (kg) | Total<br>Wattage |
|--|--|--|-------------------|--------------------------|--------------------------------------|--------------------------------------|--------------------|------------------|
| TOTE361-ADJV                                   | TOTE362-ADJV                                   | TOTE362-ADJ-CVE                                      | 36<br>(914)       | 175 - 250<br>(640 - 950) | 160<br>(4060)                        | 192<br>(4880)                        | 34 (15)            | 1440             |
| TOTE421-ADJV                                   | TOTE422-ADJV                                   | TOTE422-ADJV-CVE                                     | 42<br>(1067)      | 275<br>(1000)            | 160<br>(4060)                        | 192<br>(4880)                        | 40 (18)            | 1440             |
| TOTE481-ADJV                                   | TOTE482-ADJV                                   | TOTE482-ADJV-CVE                                     | 48<br>(1220)      | 330<br>(1250)            | 160<br>(4060)                        | 192<br>(4880)                        | 46 (21)            | 1440             |

### Accessories

| Part No.  | Description                              |
|-----------|--|
| TOTE-TOPV | Insulated top cover, minimizes heat loss |

Dimensions of top cover: 40 x 40 in (1016 x 1016 mm) with 4 in (102 mm) wide flaps. Flaps expand maximum dimensions to 48 x 48 in (1219 x 1219 mm)

Insulation thickness of top cover: 0.25 in (6 mm)



Optional Insulating Cover

Custom Sizes and Designs Available: Contact BriskHeat® or your local distributor for more information.

### EASY WAYS TO ORDER

1. Contact your local distributor. Check BriskHeat.com to locate a local distributor.
2. Call BriskHeat® at 800-848-7673 or 614-294-3376. We have a staff of application specialists to solve your unique needs.
3. Order online at BriskHeat.com - 24/7.

### PAYMENT TERMS

#### Credit Card Options



#### Net 30 Option

Net 30 Terms are available to qualified companies. Please contact your Account Manager for additional details.